


Chinasound Rocking Armature Transducer

CRT39A




Part Number	CRT39A24-10-2.2R	
Rated Voltage	(Vp-p)	24
*Coil Resistance	(ohm)	10±2
◆Sound Output @ 100cm	(dB)	98 min.
Resonant Frequency	(Hz)	2200±300
Operating Temperature	(°C)	-20~+60
Storage Temperature	(°C)	-30~+70
Weight	(g)	29.8

Dimensions (mm)

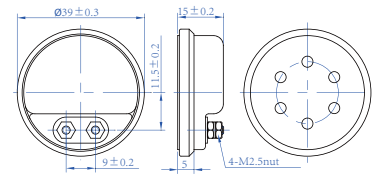

Frequency Curve

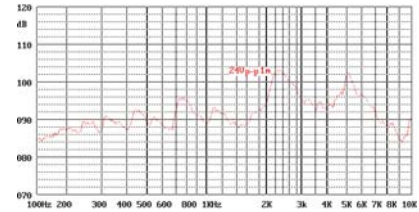


CRT39C




Part Number	CRT39C24-25-2.2-W105R	
Rated Voltage	(Vp-p)	24
*Coil Resistance	(ohm)	25±2
◆Sound Output @ 100cm	(dB)	98 min.
Resonant Frequency	(Hz)	2200±300
Operating Temperature	(°C)	-20~+60
Storage Temperature	(°C)	-30~+70
Weight	(g)	26

Dimensions (mm)

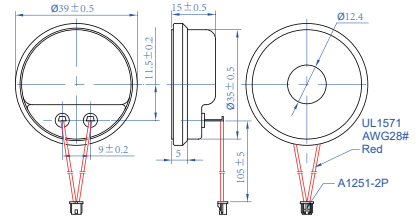

Frequency Curve

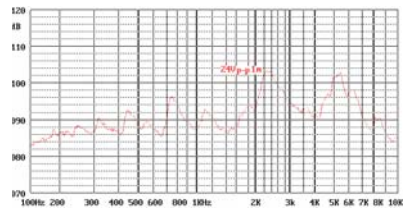


CRT39E




Part Number	CRT39E24-25-2.2R	
Rated Voltage	(Vp-p)	24
*Coil Resistance	(ohm)	25±2
◆Sound Output @ 100cm	(dB)	98 min.
Resonant Frequency	(Hz)	2200±300
Operating Temperature	(°C)	-20~+60
Storage Temperature	(°C)	-30~+70
Weight	(g)	22.8

Dimensions (mm)

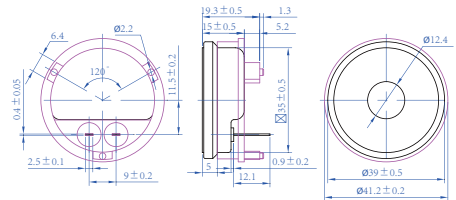

Frequency Curve

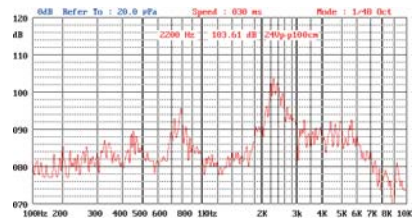


CRT46.5C




Part Number	CRT46.5C24-10-2.0-C17W90R	
Rated Voltage	(Vp-p)	24
*Coil Resistance	(ohm)	18±2
◆Sound Output @ 100cm	(dB)	100 min.
Resonant Frequency	(Hz)	2000±300
Operating Temperature	(°C)	-20~+60
Storage Temperature	(°C)	-30~+70
Weight	(g)	32.8

Dimensions (mm)

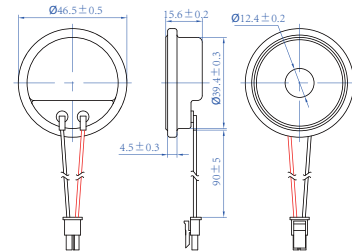

Frequency Curve

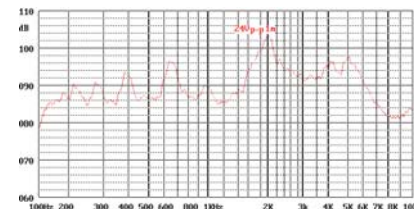

◆Other resistance is available ◆Value applying at rated voltage, resonant frequency