



CPT10A

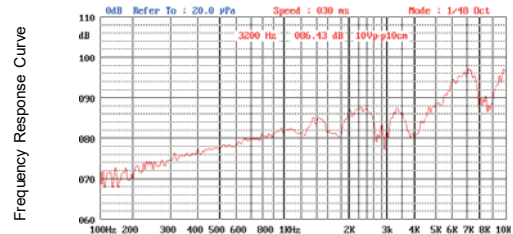



Part Number	CPT10A10-3.2-W12.7R	
Rated Voltage (Vp-p)	10	
Operating Voltage (Vp-p)	30 max.	
Rated Current @10Vp-p3.2kHz (mA)	2 max.	
Capacitance at 100Hz 1V (pF)	11000 ±30%	
SPL @ 10Vp-p10cm3.2kHz (dB)	80 min.	
Resonant Frequency (Hz)	3200 ±500	
Operating Temperature (°C)	-20~+60	
Storage Temperature (°C)	-30~+70	
Weight (g)	0.19	

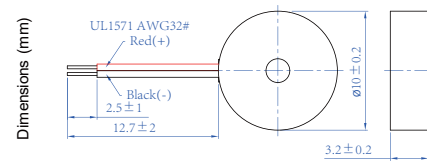

CPT10B





Part Number	CPT10A10-3.2-W12.7R	
Rated Voltage (Vp-p)	10	
Operating Voltage (Vp-p)	30 max.	
Rated Current @10Vp-p3.2kHz (mA)	2 max.	
Capacitance at 100Hz 1V (pF)	11000 ±30%	
SPL @ 10Vp-p10cm3.2kHz (dB)	78 min.	
Resonant Frequency (Hz)	3200 ±500	
Operating Temperature (°C)	-20~+60	
Storage Temperature (°C)	-30~+70	
Weight (g)	0.18	

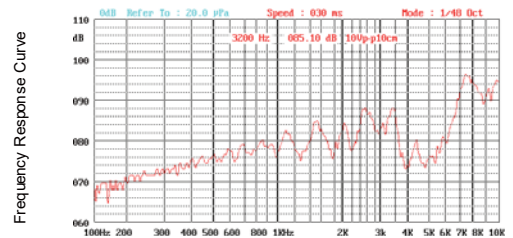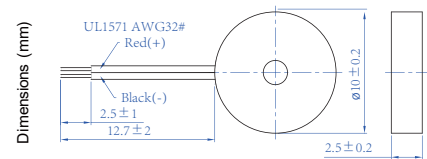

CPT12A





Part Number	CPT12A03-4.5R	
Rated Voltage (Vp-p)	3	
Operating Voltage (Vp-p)	1~20	
Rated Current @3Vp-p4.5kHz (mA)	1 max.	
Capacitance at 100Hz 1V (pF)	8000 ±30%	
SPL @ 3Vp-p10cm4.5kHz (dB)	75 min.	
Resonant Frequency (Hz)	4500 ±500	
Operating Temperature (°C)	-40~+85	
Storage Temperature (°C)	-40~+90	
Weight (g)	0.65	

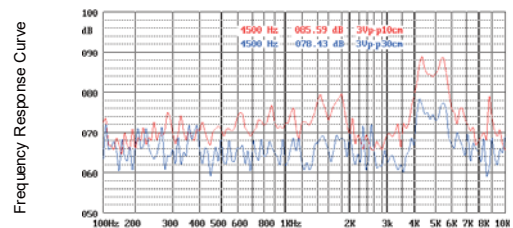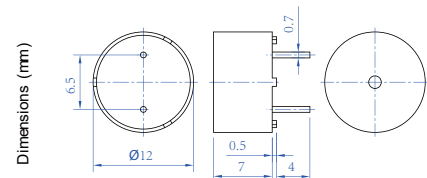

CPT13A




Part Number	CPT13A03-4.0R	
Rated Voltage (Vp-p)	3	
Operating Voltage (Vp-p)	1~20	
Rated Current @3Vp-p4kHz (mA)	1 max.	
Capacitance at 100Hz 1V (pF)	10000 ±30%	
SPL @ 3Vp-p10cm4kHz (dB)	75 min.	
Resonant Frequency (Hz)	4000 ±500	
Operating Temperature (°C)	-30~+85	
Storage Temperature (°C)	-40~+90	
Weight (g)	0.8	

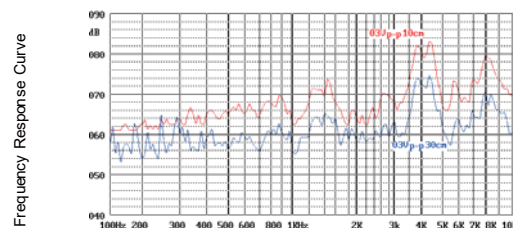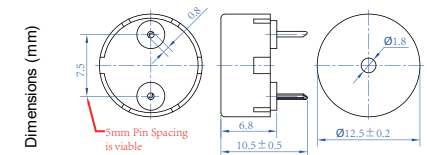


CPT13B



Part Number	CPT13B03-4.0R	
Rated Voltage (Vp-p)	3	
Operating Voltage (Vp-p)	1~20	
Rated Current @3Vp-p4KHz (mA)	2 max.	
Capacitance at 100Hz 1V (pF)	10000±30%	
SPL @ 3Vp-p10cm4KHz (dB)	75 min.	
Resonant Frequency (Hz)	4000±500	
Operating Temperature (°C)	-40~+85	
Storage Temperature (°C)	-40~+90	
Weight (g)	0.9	




Frequency Response Curve

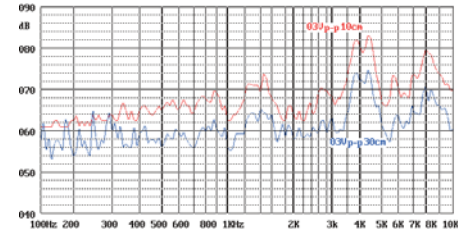


CPT13E



Part Number	CPT13E12-4.0R	
Rated Voltage (Vp-p)	12	
Operating Voltage (Vp-p)	3~30	
Rated Current 12Vp-p4KHz (mA)	4 max.	
Capacitance at 100Hz 1V (pF)	10000±30%	
SPL @ 12Vp-p10cm4KHz (dB)	88 min.	
Resonant Frequency (Hz)	4000±500	
Operating Temperature (°C)	-40~+85	
Storage Temperature (°C)	-40~+90	
Weight (g)	1.4	




Frequency Response Curve

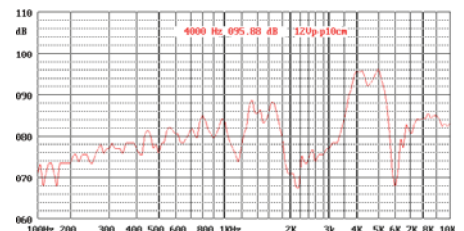


CPT13F



Part Number	CPT13F05-5.0-W50R	
Rated Voltage (Vp-p)	5	
Operating Voltage (Vp-p)	3~25	
Rated Current @3Vp-p4KHz (mA)	1 max.	
Capacitance at 100Hz 1V (pF)	10000±30%	
SPL @ 3Vp-p10cm4KHz (dB)	75 min.	
Resonant Frequency (Hz)	4000±500	
Operating Temperature (°C)	-20~+60	
Storage Temperature (°C)	-30~+70	
Weight (g)	1	

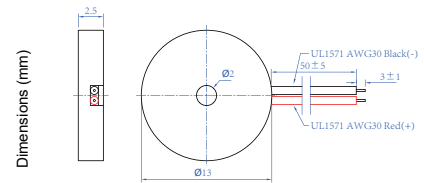


Frequency Response Curve

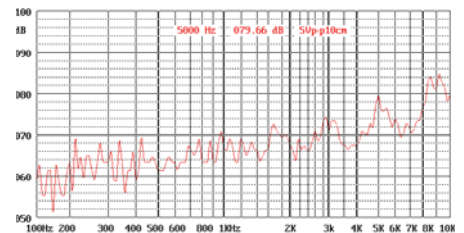

CPT14A




Part Number	CPT14A05-4.0R	
Rated Voltage (Vp-p)	5	
Operating Voltage (Vp-p)	1~25	
Rated Current @5Vp-p4KHz (mA)	1 max.	
Capacitance at 100Hz 1V (pF)	15000±30%	
SPL @ 5Vp-p10cm4KHz (dB)	85 min.	
Resonant Frequency (Hz)	4000±500	
Operating Temperature (°C)	-40~+85	
Storage Temperature (°C)	-40~+90	
Weight (g)	2.3	

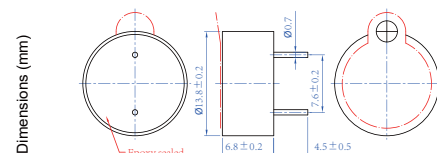

CPT14A05-4.0-1R with washable label



Frequency Response Curve

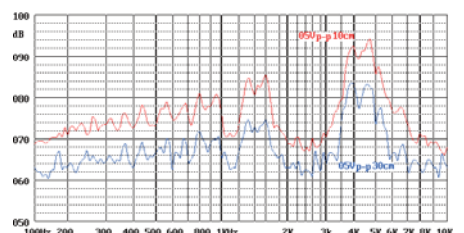

CPT14B





Part Number	CPT14B05-4.0R	
Rated Voltage	(Vp-p)	5
Operating Voltage	(Vp-p)	1~20
Rated Current @5Vp-p4KHz	(mA)	1 max.
Capacitance at 100Hz 1V	(pF)	15000-30%
SPL @ 5Vp-p10cm4KHz	(dB)	78 min.
Resonant Frequency	(Hz)	4000-500
Operating Temperature	(°C)	-30~+85
Storage Temperature	(°C)	-40~+90
Weight	(g)	1

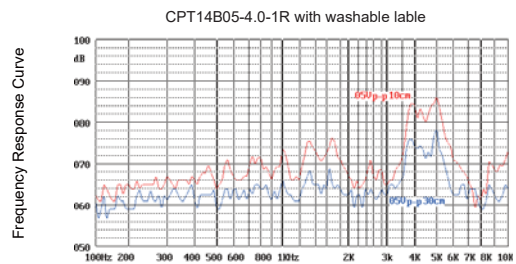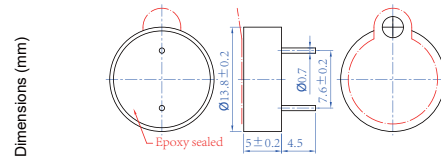

CPT14C





Part Number	CPT14C05-4.8-W60R	
Rated Voltage	(Vp-p)	5
Operating Voltage	(Vp-p)	1~25
Rated Current @5Vp-p4.8KHz	(mA)	1 max.
Capacitance at 100Hz 1V	(pF)	15000±30%
SPL @ 5Vp-p10cm4.8KHz	(dB)	78 min.
Resonant Frequency	(Hz)	4800±500
Operating Temperature	(°C)	-20~+70
Storage Temperature	(°C)	-30~+80
Weight	(g)	1

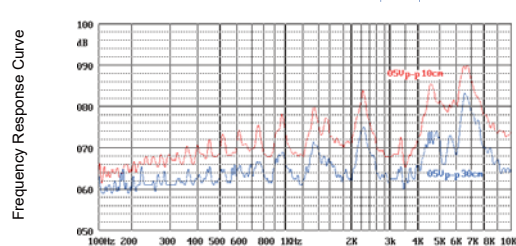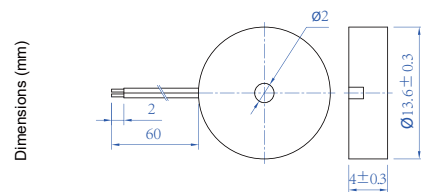

CPT14E





Part Number	CPT14E05-4.0R	
Rated Voltage	(Vp-p)	5
Operating Voltage	(Vp-p)	1~25
Rated Current @5Vp-p4KHz	(mA)	1 max.
Capacitance at 100Hz 1V	(pF)	15000±30%
SPL @ 5Vp-p10cm4KHz	(dB)	85 min.
Resonant Frequency	(Hz)	4000±500
Operating Temperature	(°C)	-30~+85
Storage Temperature	(°C)	-40~+90
Weight	(g)	0.8

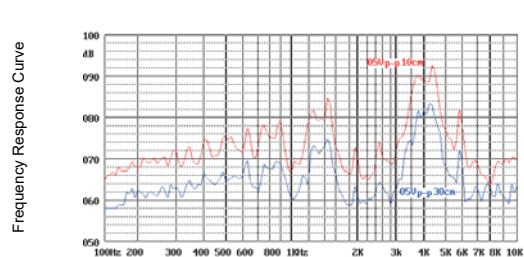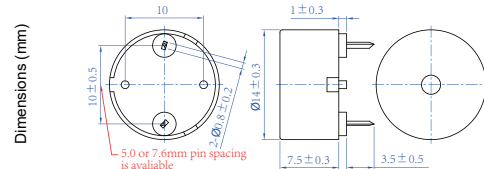

CPT17A



Part Number	CPT17A03-4.0-W85R	
Rated Voltage	(Vp-p)	3
Operating Voltage	(Vp-p)	1~30
Rated Current @3Vp-p4KHz	(mA)	1 max.
Capacitance at 100Hz 1V	(pF)	15000-30%
SPL @ 3Vp-p10cm4KHz	(dB)	78 min.
Resonant Frequency	(Hz)	4000-500
Operating Temperature	(°C)	-20~+70
Storage Temperature	(°C)	-30~+80
Weight	(g)	1

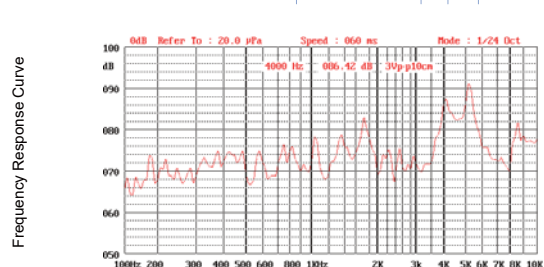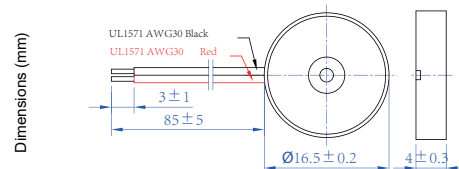


Chinasound Piezo Transducer


CPT17B



Part Number	CPT17BM03-4.0-P3.5R	
Rated Voltage	(Vp-p)	3
Operating Voltage	(Vp-p)	1~30
Rated Current @3Vp-p4KHz	(mA)	1 max.
Capacitance at 100Hz 1V	(pF)	15000 ±30%
SPL @ 3Vp-p10cm4KHz	(dB)	80 min.
Resonant Frequency	(Hz)	4000 ±500
Operating Temperature	(°C)	-40~+105
Storage Temperature	(°C)	-40~+120
Weight	(g)	1.16

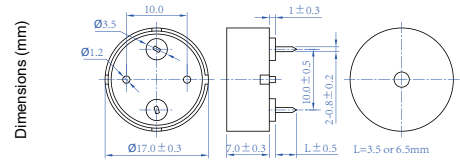


Frequency Response Curve

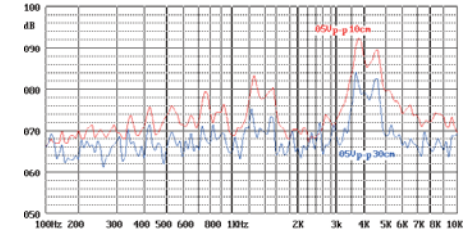


CPT17C



Part Number	CPT17C05-4.0R	
Rated Voltage	(Vp-p)	5
Operating Voltage	(Vp-p)	1~30
Rated Current @5Vp-p4KHz	(mA)	1 max.
Capacitance at 100Hz 1V	(pF)	12000 ±30%
SPL @ 5Vp-p10cm4KHz	(dB)	85 min.
Resonant Frequency	(Hz)	4000±500
Operating Temperature	(°C)	-40~+85
Storage Temperature	(°C)	-40~+90
Weight	(g)	1.4

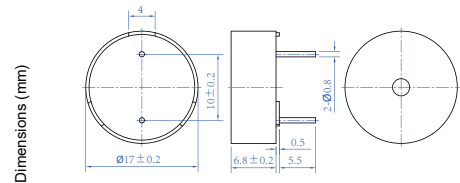


Frequency Response Curve

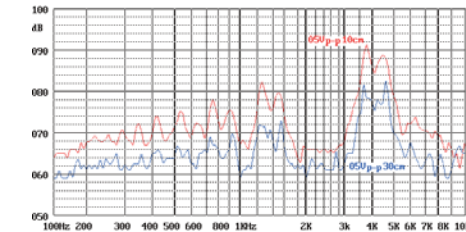


CPT17D



Part Number	CPT17D03-2.0R	
Rated Voltage	(Vp-p)	3
Operating Voltage	(Vp-p)	1~25
Rated Current @3Vp-p2KHz	(mA)	1 max.
Capacitance at 100Hz 1V	(pF)	34000 ±30%
SPL @ 3Vp-p10cm2KHz	(dB)	75 min.
Resonant Frequency	(Hz)	2000±500
Operating Temperature	(°C)	-30~+85
Storage Temperature	(°C)	-40~+90
Weight	(g)	1.5

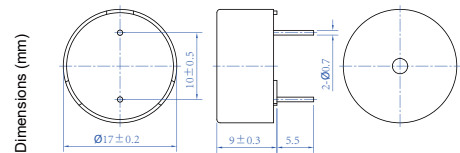


Frequency Response Curve

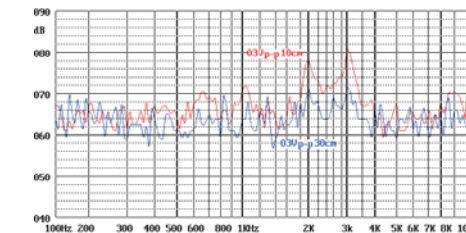


CPT17F



Part Number	CPT17F03-5.0R	
Rated Voltage	(Vp-p)	5
Operating Voltage	(Vp-p)	1~30
Rated Current @3Vp-p5KHz	(mA)	1 max.
Capacitance at 100Hz 1V	(pF)	12000 ±30%
SPL @ 3Vp-p10cm5KHz	(dB)	80 min.
Resonant Frequency	(Hz)	5000 ±500
Operating Temperature	(°C)	-30~+85
Storage Temperature	(°C)	-40~+90
Weight	(g)	1

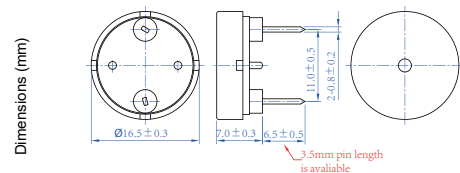



Frequency Response Curve

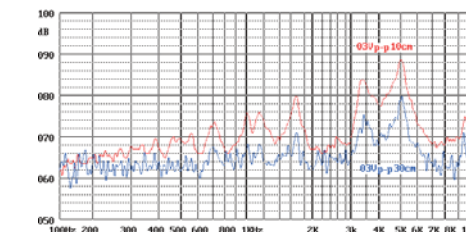

CPT17G





Part Number		CPT17G03-2.0R
Rated Voltage	(Vp-p)	3
Operating Voltage	(Vp-p)	1~30
Rated Current @3Vp-p2KHz	(mA)	1 max.
Capacitance at 100Hz 1V	(pF)	34000±30%
SPL @ 3Vp-p10cm2KHz	(dB)	70 min.
Resonant Frequency	(Hz)	2000±500
Operating Temperature	(°C)	-30~+85
Storage Temperature	(°C)	-40~+90
Weight	(g)	1.0

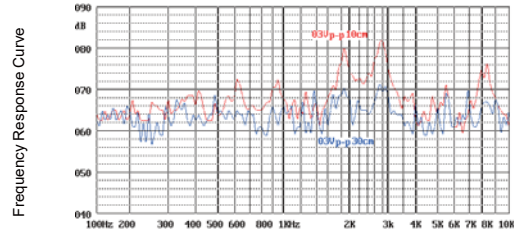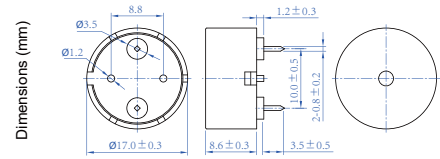

CPT22A





Part Number		CPT22A03-4.0R
Rated Voltage	(Vp-p)	3
Operating Voltage	(Vp-p)	1~30
Rated Current @3Vp-p4KHz	(mA)	1 max.
Capacitance at 100Hz 1V	(pF)	14000±30%
SPL @ 3Vp-p10cm4KHz	(dB)	80 min.
Resonant Frequency	(Hz)	4000±500
Operating Temperature	(°C)	-30~+85
Storage Temperature	(°C)	-40~+90
Weight	(g)	2

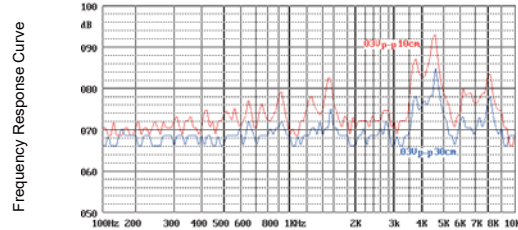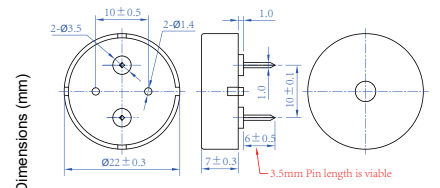

CPT22B





Part Number		CPT22B03-2.0R
Rated Voltage	(Vp-p)	3
Operating Voltage	(Vp-p)	1~25
Rated Current @3Vp-p2KHz	(mA)	2 max.
Capacitance at 100Hz 1V	(pF)	19000±30%
SPL @ 3Vp-p10cm2KHz	(dB)	75 min.
Resonant Frequency	(Hz)	2000±500
Operating Temperature	(°C)	-30~+85
Storage Temperature	(°C)	-40~+90
Weight	(g)	3

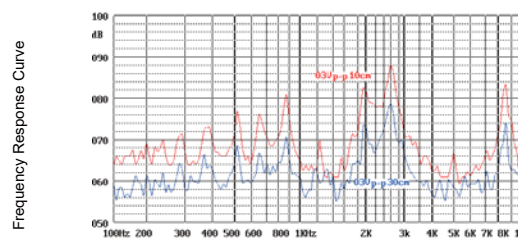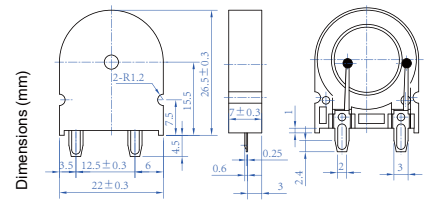

CPT22C



Part Number		CPT22C03-2.7R
Rated Voltage	(Vp-p)	3
Operating Voltage	(Vp-p)	1~20
Rated Current @3Vp-p2.7KHz	(mA)	1 max.
Capacitance at 100Hz 1V	(pF)	19000±30%
SPL @ 3Vp-p10cm2.7KHz	(dB)	80 min.
Resonant Frequency	(Hz)	2700±500
Operating Temperature	(°C)	-40~+125
Storage Temperature	(°C)	-40~+120
Weight	(g)	2.3

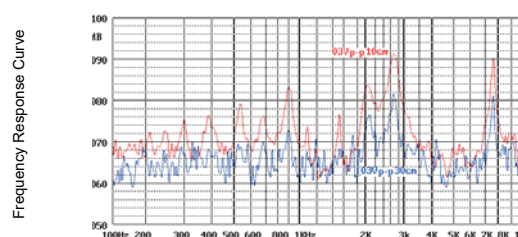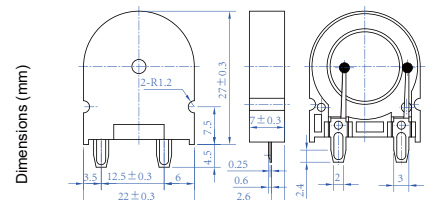


Chinasound Piezo Transducer

CPT22E



Part Number	CPT22EM03-2.0-P3.5R	
Rated Voltage (Vp-p)	3	
Operating Voltage (Vp-p)	1~30	
Rated Current @3Vp-p2KHz (mA)	1 max.	
Capacitance at 100Hz 1V (pF)	19000±30%	
SPL @ 3Vp-p10cm2KHz (dB)	75 min.	
Resonant Frequency (Hz)	2000±500	
Operating Temperature (°C)	-40~+105	
Storage Temperature (°C)	-40~+125	
Weight (g)	2.5	

Frequency Response Curve

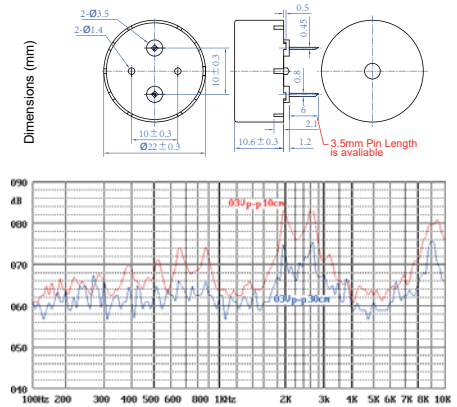


CPT22F



Part Number	CPT22F09-2.5R	
Rated Voltage (Vp-p)	9	
Operating Voltage (Vp-p)	1~30	
Rated Current @9Vp-p2.5KHz (mA)	3 max.	
Capacitance at 100Hz 1V (pF)	19000±30%	
SPL @ 9Vp-p10cm2.5KHz (dB)	85 min.	
Resonant Frequency (Hz)	2500±500	
Operating Temperature (°C)	-30~+85	
Storage Temperature (°C)	-40~+90	
Weight (g)	2.5	

Frequency Response Curve

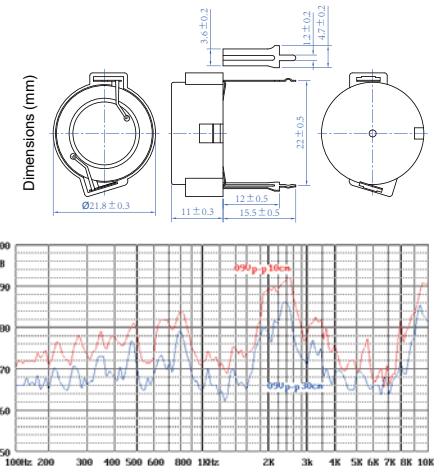


CPT22G



Part Number	CPT22G10-4.8-W135R	
Rated Voltage (Vp-p)	10	
Operating Voltage (Vp-p)	1~30	
Rated Current @10Vp-p4KHz (mA)	3 max.	
Capacitance at 100Hz 1V (pF)	15000±30%	
SPL @ 10Vp-p10cm4KHz (dB)	90 min.	
Resonant Frequency (Hz)	4800±500	
Operating Temperature (°C)	-20~+60	
Storage Temperature (°C)	-30~+70	
Weight (g)	2.2	

Frequency Response Curve

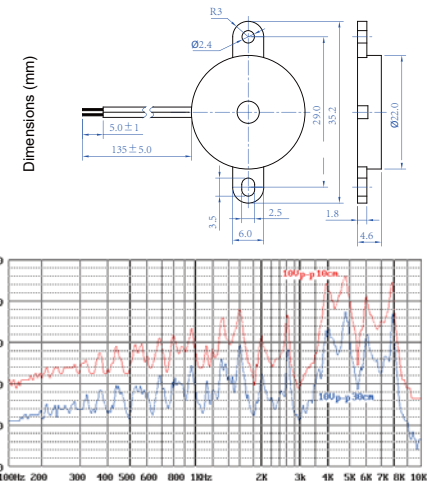


CPT22I



Part Number	CPT22IM03-4.0-P3.5R	
Rated Voltage (Vp-p)	3	
Operating Voltage (Vp-p)	1~30	
Rated Current @9Vp-p4KHz (mA)	2 max.	
Capacitance at 100Hz 1V (pF)	19000±30%	
SPL @ 9Vp-p10cm4KHz (dB)	85 min.	
Resonant Frequency (Hz)	4000~500	
Operating Temperature (°C)	-40~+105	
Storage Temperature (°C)	-40~+120	
Weight (g)	3	


Frequency Response Curve

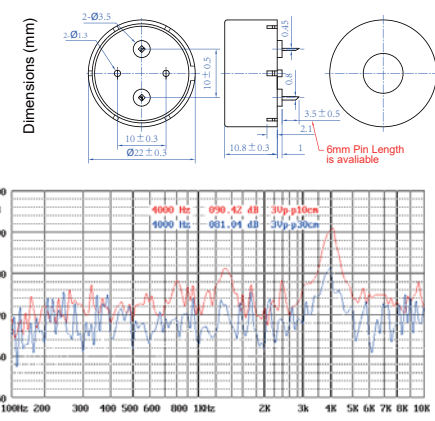

CPT22J




Part Number	CPT22JS03-3.53F	
Rated Voltage	(Vp-p)	3
Operating Voltage	(Vp-p)	1~30
Rated Current @3Vp-p3.53KHz	(mA)	1 max.
Capacitance at 100Hz 1V	(pF)	25000±30%
SPL @ 3Vp-p10cm3.53KHz	(dB)	85 min.
Resonant Frequency	(Hz)	4000~500
Operating Temperature	(°C)	-30~+85
Storage Temperature	(°C)	-40~+90
Weight	(g)	2

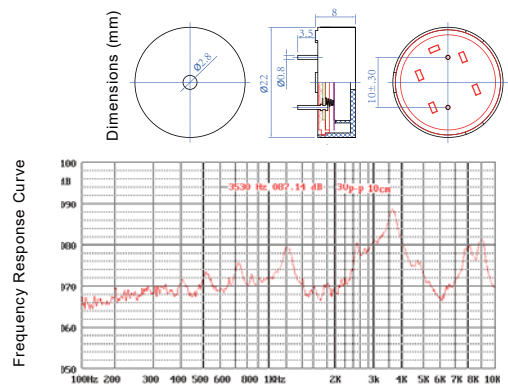

CPT23B




Part Number	CPT23B03-2.0R	
Rated Voltage	(Vp-p)	3
Operating Voltage	(Vp-p)	1~30
Rated Current@3Vp-p2KHz	(mA)	1 max.
Capacitance at 100Hz 1V	(pF)	24000±30%
SPL @3Vp-p10cm2KHz	(dB)	75 min.
Resonant Frequency	(Hz)	4000±500
Operating Temperature	(°C)	-30~+85
Storage Temperature	(°C)	-40~+90
Weight	(g)	2

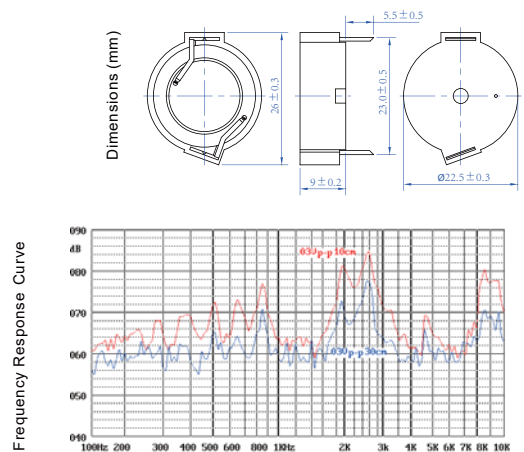

CPT23C




Part Number	CPT23C09-2.5F	
Rated Voltage	(Vp-p)	3
Operating Voltage	(Vp-p)	1~25
Rated Current@9Vp-p2.5KHz	(mA)	1 max.
Capacitance at 100Hz 1V	(pF)	15000±30%
SPL @9Vp-p10cm2.5KHz	(dB)	75 min.
Resonant Frequency	(Hz)	4000±500
Operating Temperature	(°C)	-30~+85
Storage Temperature	(°C)	-40~+90
Weight	(g)	0.8

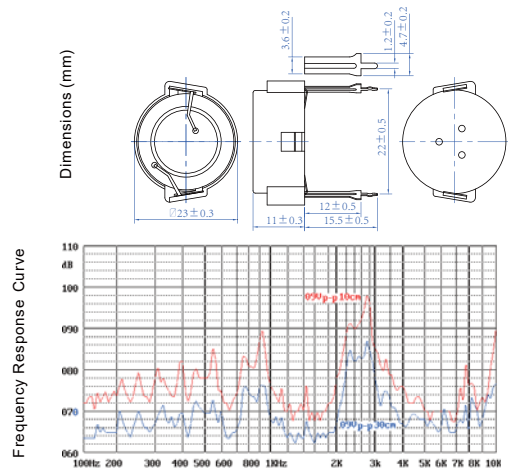

CPT24C





Part Number	CPT24C10-4.0-W50R	
Rated Voltage	(Vp-p)	10
Operating Voltage	(Vp-p)	1~30
Rated Current@10Vp-p3KHz	(mA)	5 max.
Capacitance at 100Hz 1V	(pF)	19000±30%
SPL @ 10Vp-p10cm3KHz	(dB)	85 min.
Resonant Frequency	(Hz)	4000±500
Operating Temperature	(°C)	-20~+60
Storage Temperature	(°C)	-30~+70
Weight	(g)	1.9

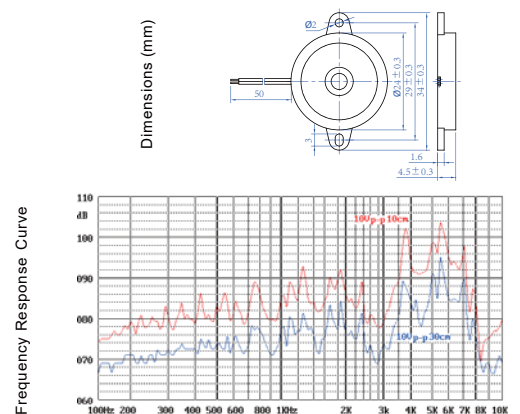

CPT24G





Part Number	CPT24GS12-3.0-P3F	
Rated Voltage	(Vp-p)	12
Operating Voltage	(Vp-p)	1~30
Rated Current @12Vp-p3Khz	(mA)	8 max.
Capacitanceat 100Hz1V	(pF)	25000±30%
SPL @ 12Vp-p10cm3Khz	(dB)	90 min.
Resonant Frequency	(Hz)	3000±500
Operating Temperature	(°C)	-40~+95
Storage Temperature	(°C)	-40~+105
Weight	(g)	3.4

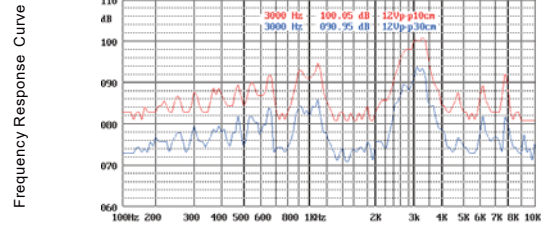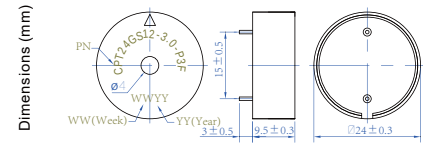

CPT25A





Part Number	CPT25A12-0.4R	
Rated Voltage	(Vp-p)	12
Operating Voltage	(Vp-p)	3~30
Rated Current @12Vp-p0.4Khz	(mA)	1 max.
Capacitanceat 100Hz1V	(pF)	17000±30%
SPL @ 12Vp-p10cm0.4Khz	(dB)	79 min.
Resonant Frequency	(Hz)	400±100
Operating Temperature	(°C)	-30~+85
Storage Temperature	(°C)	-40~+90
Weight	(g)	4.9

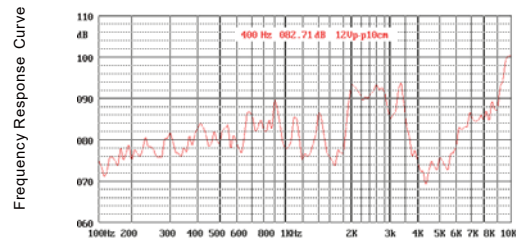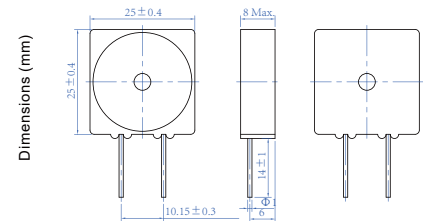

CPT25A-BP





Part Number	CPT25A12BP-0.4R	
Rated Voltage	(Vp-p)	12
Operating Voltage	(Vp-p)	3~30
Rated Current @12Vp-p0.4Khz	(mA)	1 max.
Capacitanceat 100Hz1V	(pF)	17000±30%
SPL @ 12Vp-p10cm0.4Khz	(dB)	79 min.
Resonant Frequency	(Hz)	400±100
Operating Temperature	(°C)	-30~+85
Storage Temperature	(°C)	-40~+90
Weight	(g)	4.9

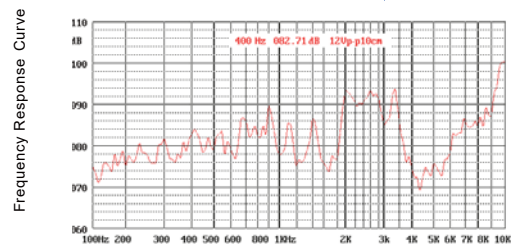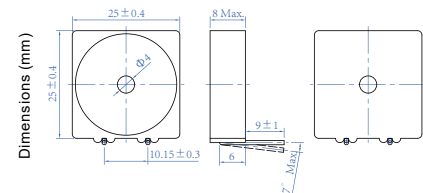

CPT30C





Part Number	CPT30CW10-4.0-W100R	
Rated Voltage	(Vp-p)	10
Operating Voltage	(Vp-p)	1~30
Rated Current @10Vp-p4Khz	(mA)	3 max.
Capacitanceat 100Hz1V	(pF)	25000±30%
SPL @ 10Vp-p10cm4Khz	(dB)	90 min.
Resonant Frequency	(Hz)	4000±500
Operating Temperature	(°C)	-20~+60
Storage Temperature	(°C)	-30~+70
Weight	(g)	4

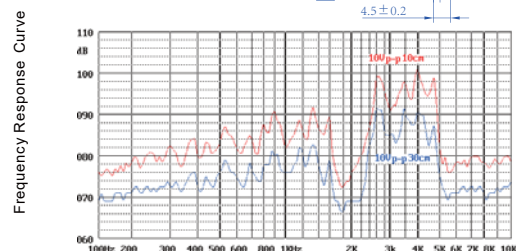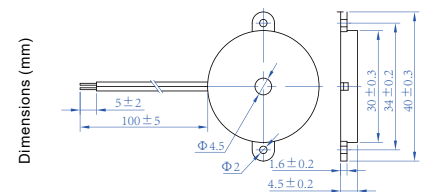

CPT30E





Part Number		CPT30E10-4.5-W110R
Rated Voltage	(Vp-p)	10
Operating Voltage	(Vp-p)	1~30
Rated Current @10Vp-p4.5Khz	(mA)	11 max.
Capacitance at 100Hz 1V	(pF)	18000 ±30%
SPL @ 10Vp-p10cm4.5Khz	(dB)	97 min.
Resonant Frequency	(Hz)	4500 ±500
Operating Temperature	(°C)	-20~+65
Storage Temperature	(°C)	-30~+70
Weight	(g)	4

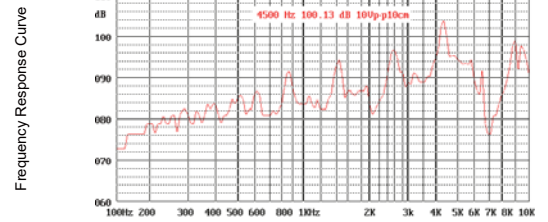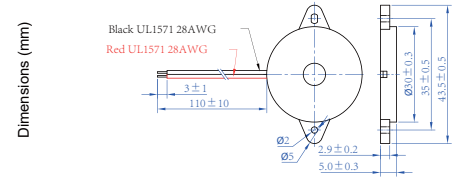

CPT30F





Part Number		CPT30F16-3.0R
Rated Voltage	(Vp-p)	16
Operating Voltage	(Vp-p)	1~30
Rated Current @16Vp-p3Khz	(mA)	5 max.
Capacitance at 100Hz 1V	(pF)	35000 ±30%
SPL @ 16Vp-p10cm3Khz	(dB)	98 min.
Resonant Frequency	(Hz)	3000 ±500
Operating Temperature	(°C)	-30~+85
Storage Temperature	(°C)	-40~+90
Weight	(g)	9

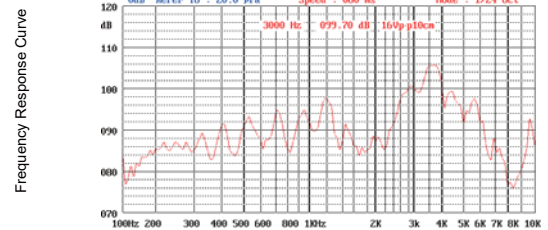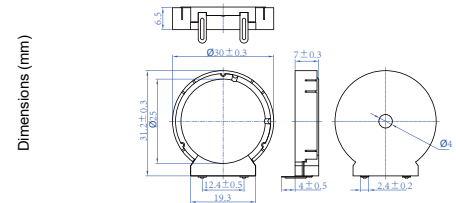

CPT30G





Part Number		CPT30G03-2.5R
Rated Voltage	(Vrms)	3
Operating Voltage	(Vrms)	1~30
Rated Current @3Vrms2.5Khz	(mA)	2 max.
Capacitance at 100Hz 1V	(pF)	35000 ±30%
SPL @ 3Vrms10cm2.5Khz	(dB)	90 min.
Resonant Frequency	(Hz)	2500 ±500
Operating Temperature	(°C)	-40~+85
Storage Temperature	(°C)	-40~+90
Weight	(g)	4.5

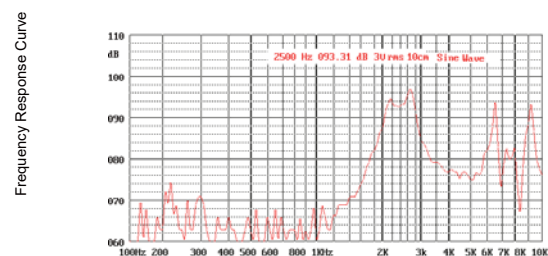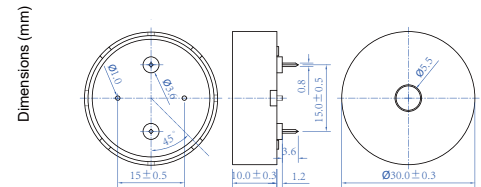

CPT30H





Part Number		CPT30H18-3.4-W40R
Rated Voltage	(Vp-p)	18
Operating Voltage	(Vp-p)	3~30
Rated Current @18Vp-p3.4Khz	(mA)	5 max.
Capacitance at 100Hz 1V	(pF)	25000 ±30%
SPL @ 18Vp-p30cm3.4Khz	(dB)	85 min.
Resonant Frequency	(Hz)	3400 ±500
Operating Temperature	(°C)	-20~+70
Storage Temperature	(°C)	-30~+70
Weight	(g)	8

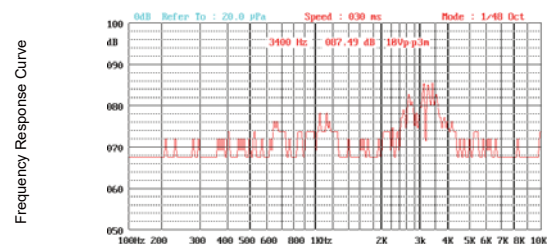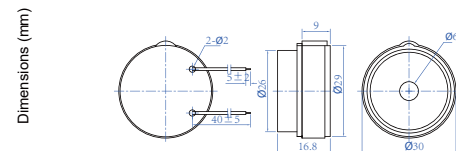

CPT35A





Part Number		CPT35A10-1.1-W110R
Rated Voltage	(Vp-p)	10
Operating Voltage	(Vp-p)	1~30
Rated Current @10Vp-p1.1Khz	(mA)	3 max.
Capacitance at 100Hz 1V	(pF)	50000±30%
SPL @ 10Vp-p10cm1.1Khz	(dB)	85 min.
Resonant Frequency	(Hz)	1100±500
Operating Temperature	(°C)	-20~+60
Storage Temperature	(°C)	-30~+70
Weight	(g)	4.9

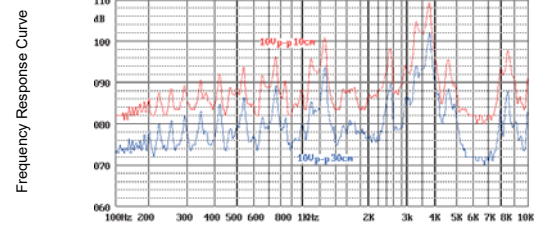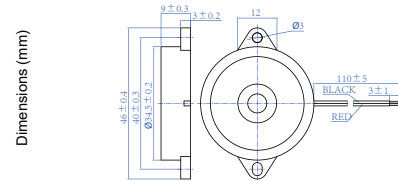

CPT35B





Part Number		CPT35B03-1.1-W100R
Rated Voltage	(Vp-p)	3
Operating Voltage	(Vp-p)	1~30
Rated Current @3Vp-p1.1Khz	(mA)	1 max.
Capacitance at 100Hz 1V	(pF)	80000±30%
SPL @ 3Vp-p10cm1.1Khz	(dB)	68 min.
Resonant Frequency	(Hz)	1100±500
Operating Temperature	(°C)	-20~+60
Storage Temperature	(°C)	-30~+70
Weight	(g)	2.3

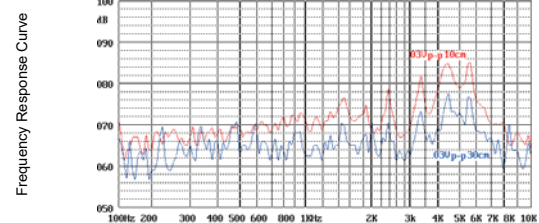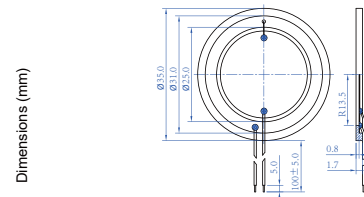

CPT40A





Part Number		CPT40A05-3.0R
Rated Voltage	(Vp-p)	5
Operating Voltage	(Vp-p)	3~30
Rated Current @5Vp-p3Khz	(mA)	5 max.
Capacitance at 100Hz 1V	(pF)	30000±30%
SPL @ 5Vp-p30cm3Khz	(dB)	90 min.
Resonant Frequency	(Hz)	3000±500
Operating Temperature	(°C)	-40~+70
Storage Temperature	(°C)	-55~+85
Weight	(g)	12

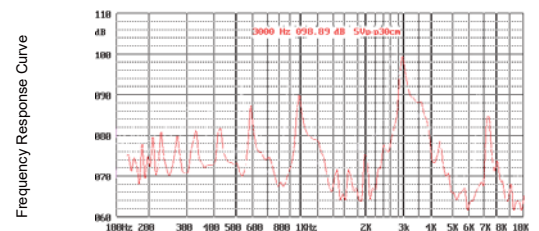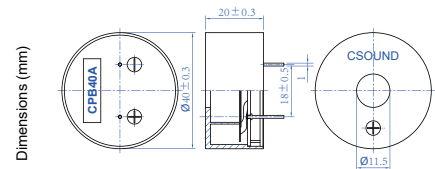

CPT44A





Part Number		CPT44A10-3.0-W105R
Rated Voltage	(Vp-p)	10
Operating Voltage	(Vp-p)	1~30
Rated Current @10Vp-p3Khz	(mA)	8 max.
Capacitance at 100Hz 1V	(pF)	70000±30%
SPL @ 10Vp-p10cm3Khz	(dB)	95 min.
Resonant Frequency	(Hz)	3000±500
Operating Temperature	(°C)	-20~+60
Storage Temperature	(°C)	-30~+70
Weight	(g)	9.6

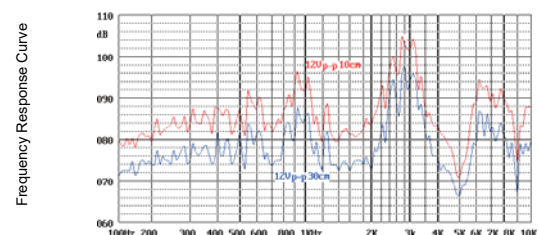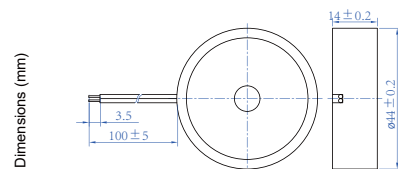

CPT44C





Part Number	CPT44C10-3.0-W90R	
Rated Voltage	(Vp-p)	10
Operating Voltage	(Vp-p)	1~30
Rated Current @10Vp-p3KHz	(mA)	8 max.
Capacitance at 100Hz 1V	(pF)	80000-30%
SPL @ 10Vp-p10cm3KHz	(dB)	95 min.
Resonant Frequency	(Hz)	4000-500
Operating Temperature	(°C)	-20~+60
Storage Temperature	(°C)	-30~+70
Weight	(g)	8.4

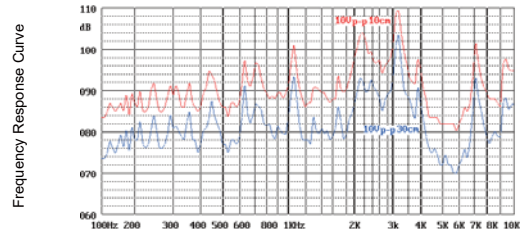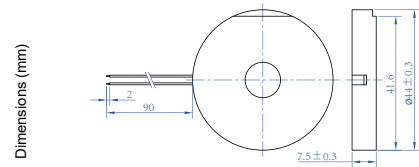

CPT44D





Part Number	CPT44D12-3.0-C15W30R	
Rated Voltage	(Vp-p)	12
Operating Voltage	(Vp-p)	1~30
Rated Current @12Vp-p3KHz	(mA)	8 max.
Capacitance at 100Hz 1V	(pF)	70000-30%
SPL @ 12Vp-p10cm3KHz	(dB)	95 min.
Resonant Frequency	(Hz)	3000-500
Operating Temperature	(°C)	-20~+60
Storage Temperature	(°C)	-30~+70
Weight	(g)	11.1

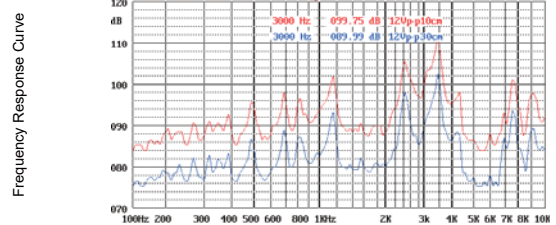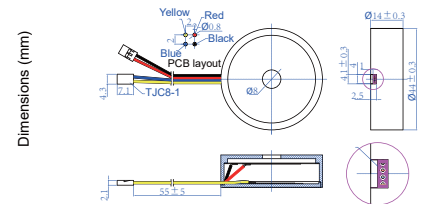

CPT44E





Part Number	CPT44E12-2.5R	
Rated Voltage	(Vp-p)	12
Operating Voltage	(Vp-p)	50 max.
Rated Current @12Vp-p2.5KHz	(mA)	60 max.
Capacitance at 100Hz 1V	(pF)	250000-30%
SPL @ 12Vp-p100cm2.5KHz	(dB)	100 min.
Resonant Frequency	(Hz)	2500-500
Operating Temperature	(°C)	-40~+85
Storage Temperature	(°C)	-40~+90
Weight	(g)	11

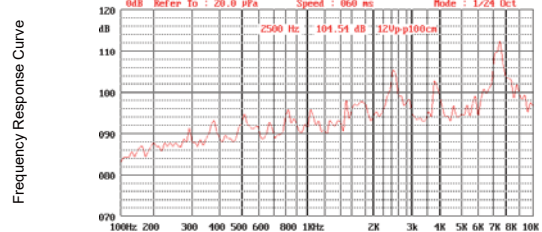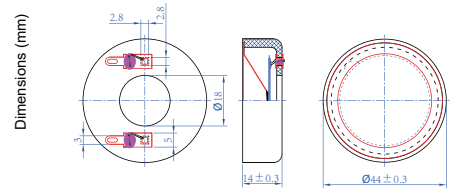

CPT44F





Part Number	CPT44F12-2.5R	
Rated Voltage	(Vp-p)	12
Operating Voltage	(Vp-p)	50 max.
Rated Current @12Vp-p2.5KHz	(mA)	60 max.
Capacitance at 100Hz 1V	(pF)	250000-30%
SPL @ 12Vp-p100cm2.5KHz	(dB)	95 min.
Resonant Frequency	(Hz)	2500-500
Operating Temperature	(°C)	-40~+85
Storage Temperature	(°C)	-40~+90
Weight	(g)	6.5

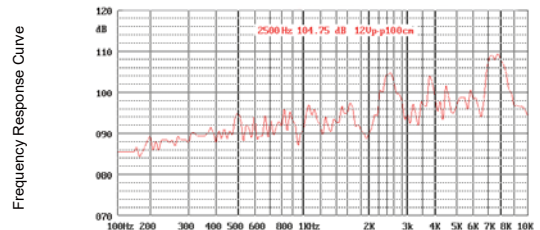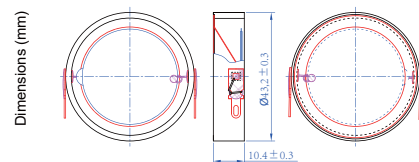


CPT45A





Part Number		CPT45A12-2.5R
Rated Voltage	(Vp-p)	12
Operating Voltage	(Vp-p)	3~50
Rated Current @12Vp-p2.5KHz	(mA)	40 max.
Capacitance at 100Hz 1V	(pF)	250000±30%
SPL @ 12Vp-p60cm2.5KHz	(dB)	95 min.
Resonant Frequency	(Hz)	2500±500
Operating Temperature	(°C)	-30~+95
Storage Temperature	(°C)	-40~+105
Weight	(g)	11

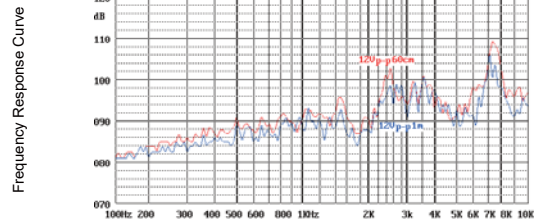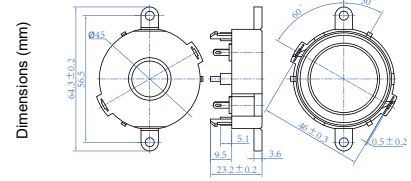

CPT50A





Part Number		CPT50A10-1.0-W80R
Rated Voltage	(Vp-p)	10
Operating Voltage	(Vp-p)	1~30
Rated Current @10Vp-p1KHz	(mA)	2 max.
Capacitance at 100Hz 1V	(pF)	30000±30%
SPL @ 10Vp-p10cm1KHz	(dB)	75 min.
Resonant Frequency	(Hz)	1000~500
Operating Temperature	(°C)	-20~+60
Storage Temperature	(°C)	-30~+70
Weight	(g)	3.5

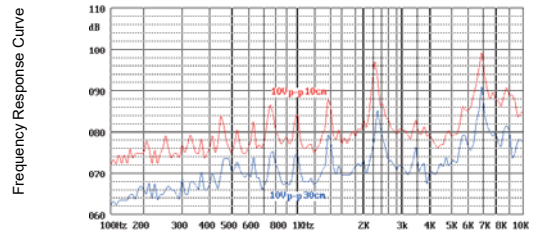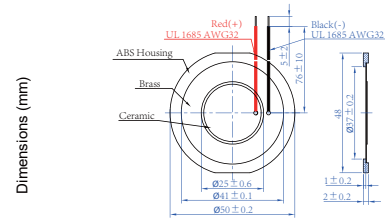

CPT51A





Part Number		CPT51A12-2.6NR
Rated Voltage	(Vp-p)	12
Operating Voltage	(Vp-p)	3~80
Rated Current @12Vp-p2.6KHz	(mA)	40 max.
Capacitance at 100Hz 1V	(pF)	250000±30%
SPL @ 12Vp-p100cm2.6KHz	(dB)	93 min.
Resonant Frequency	(Hz)	2600±500
Operating Temperature	(°C)	-40~+85
Storage Temperature	(°C)	-50~+95
Weight	(g)	10

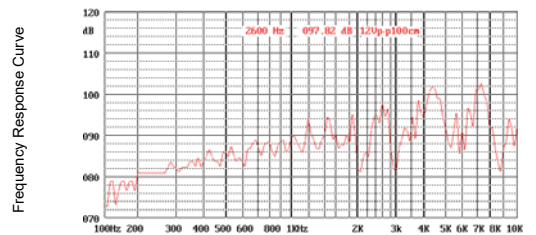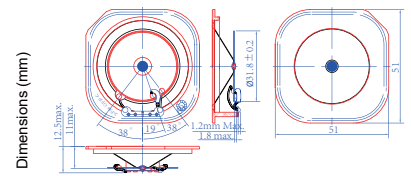

CPT54A





Part Number		CPT54A12-3.2-C30W45R
Rated Voltage	(Vp-p)	12
Operating Voltage	(Vp-p)	1~30
Rated Current @12Vp-p3.2KHz	(mA)	8 max.
Capacitance at 100Hz 1V	(pF)	45000±30%
SPL @ 12Vp-p30cm3.2KHz	(dB)	95 min.
Resonant Frequency	(Hz)	3200±500
Operating Temperature	(°C)	-20~+60
Storage Temperature	(°C)	-30~+70
Weight	(g)	9.6

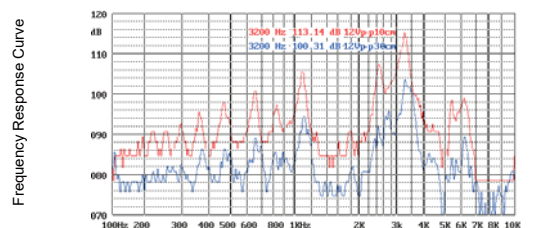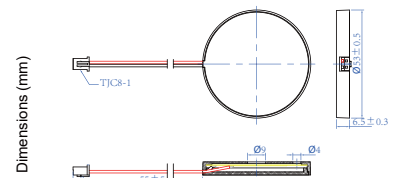

CPT55A





Part Number		CPT55A12-4.0R
Rated Voltage	(Vp-p)	12
Operating Voltage	(Vp-p)	3~50
Rated Current @12Vp-p4Khz	(mA)	50 max.
Capacitance at 100Hz 1V	(pF)	250000±30%
SPL @ 12Vp-p100cm4Khz	(dB)	95 min.
Resonant Frequency	(Hz)	4000±500
Operating Temperature	(°C)	-30~+85
Storage Temperature	(°C)	-40~+90
Weight	(g)	30.5

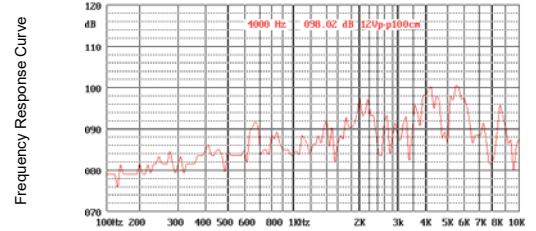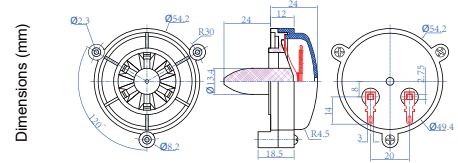

CPT60A



Part Number		CPT60A12-2.5-C12W80R
Rated Voltage	(Vp-p)	12
Operating Voltage	(Vp-p)	3~50
Rated Current @12Vp-p2.5hz	(mA)	40 max.
Capacitance at 100Hz 1V	(pF)	250000±30%
SPL @ 12Vp-p100cm2.5Khz	(dB)	90 min.
Resonant Frequency	(Hz)	2500±500
Operating Temperature	(°C)	-30~+85
Storage Temperature	(°C)	-40~+90
Weight	(g)	15

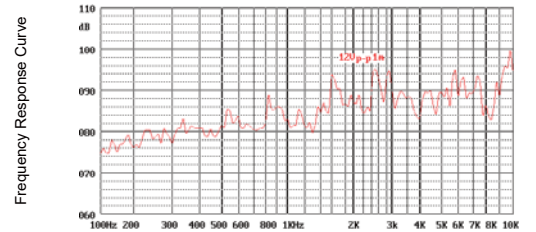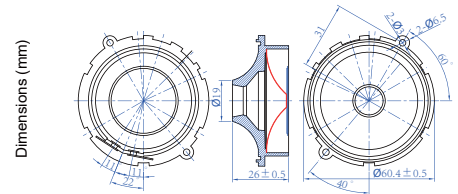

CPT110A



Part Number		CPT110A12-4.0R
Rated Voltage	(Vp-p)	12
Operating Voltage	(Vp-p)	3~50
Rated Current @12Vp-p4Khz	(mA)	50 max.
Capacitance at 100Hz 1V	(pF)	500000±30%
SPL @ 12Vp-p100cm4Khz	(dB)	100 min.
Resonant Frequency	(Hz)	4000±500
Operating Temperature	(°C)	-30~+85
Storage Temperature	(°C)	-40~+90
Weight	(g)	85

